


# Aryaka Network Access Point (ANAP) Datasheet ANAP Datasheet

Aryaka's ANAP (Aryaka Network Access Point) is an appliance that delivers on a virtualized, software-defined branch (SD-Branch) solution and is included and is part of Aryaka's SmartServices. It aggregates multiple WAN connections and provides converged network services including routing, encryption, security and traffic management. ANAP also supports redundancy with high-availability configuration options.

# **Aryaka Solution Overview**



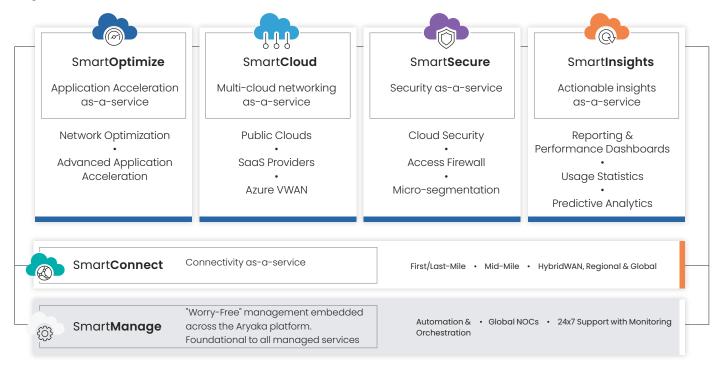

Aryaka's ANAP appliance helps enterprises simplify their branch by consolidating networking and security into a single software-defined and cloud-managed device, eliminating the need for a multitude of separate, function-specific appliances. Aryaka's ANAP is the on-ramp to the Aryaka managed global SD-WAN enterprise networking solution and integrates advanced networking, application optimization and acceleration as well as security functions.


The ANAP product family consists of appliances based on an extremely adaptable white box architecture running the industry-standard Linux operating system, which provides built-in virtualization (KVM) and containerization technology to support Virtual Network Functions (VNFs).

Aryaka's ANAP, enterprises can deliver enterprise-class connectivity to remote locations (which often lack qualified IT personnel) within less than 48 hours by leveraging the ANAP's ZTD (Zero Touch Deployment) model. Zero Touch Deployment means that appliances are simply sent to any location without the need to configure them beforehand. The Aryaka Managed SD-WAN solution helps enterprises reduce the CAPEX and OPEX of their WAN and branch infrastructure while delivering on superior application performance as well as optimal cloud connectivity.

# **Benefits**

- **Deployment simplicity and integrated design:** Aryaka's ANAP comes pre-configured and is easily implemented with a zero-touch deployment model.
- Software-defined solution: Built on top of a hardened Linux operating system, Aryaka's ANAP implements
  networking, application optimization and security services as software functions, avoiding the built-in
  obsolescence of custom architectures.
- Built-in SD-WAN: Aryaka's ANAP is an integral component of Aryaka's SmartServices. It helps enterprises
  leverage any last-mile transport (MPLS, hardened internet) and can leverage the high-quality Aryaka core
  network to attain MPLS quality-of-service levels.
- **HybridWAN** support providing Aryaka L2 Core, MPLS, site-to-site internet and public internet path options.
- Built-in Azure Virtual WAN support.
- **Built-in security:** The ANAP implements a stateful, L3/4 firewall to thwart attacks to the branch. It also implements branch traffic segmentation: corporate traffic is kept strictly separate from other types of traffic such as DMZ or Guest WiFi traffic. The ANAP also supports NFV-based virtual firewalls from Tier-1 security vendors.
- **Redundancy:** Support for link (dual ISP links) and device (VRRP) redundancy delivers on very high availability requirements (see illustration). Fail-to-wire is supported for inline mode.
- **Better user experience:** Deterministic, predictable performance for applications residing in the data center or in the cloud.
- Multi-Tenant Solution: Aryaka's ANAP supports up to 32 tenants via micro-segmentation.
- Flexible branch deployment options including inline, simple routed, hybrid and edge routed mode.
- **Greater agility:** Faster, easier deployment and operation of of your managed SD-WAN, with greater performance using less bandwidth. Add new revenue generating services in minutes not months.

# **ANAP Redundancy**

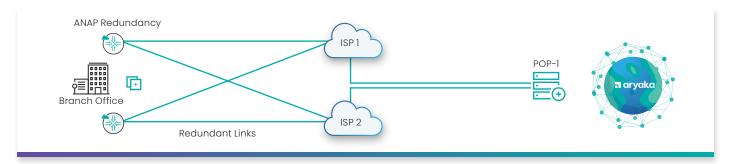

# **Hardware Specifications**

	ANAP 1500	ANAP 2500/2600	ANAP 3000	ANAP 10000
Bandwidth	Up to 150Mbps	Up to 650Mbps	Up to 1 Gbps	Up to 3Gbps
Interface type	Copper	Copper	Copper/Fiber	Copper/Fiber
NFV Capable	No	No/Yes	Yes	Yes
QoS / WAN	Yes	Yes	Yes	Yes
Optimization	Yes	Yes	Yes	Yes
Routing	Yes	Yes	Yes	Yes
Edge Security	Yes	Yes	Yes	Yes
Cloud Security	Yes	Yes	Yes	Yes
Connectors	Yes	Yes	Yes	Yes
Monitoring	Yes	Yes	Yes	Yes
Recommended for	Small Sites	Medium Sites	Large Sites	Large Sites

ANAP Datasheet 2

# **ANAP Architecture Highlights**

### - QoS

IP 5-tuple-based marking DSCP/ToS-based classification Classification and Marking

> **DNS lookup** SNI lookup

DPI (Deep Packet Inspection

5 classes of service with bandwidth reservation/limits Hierarchical Class of Service Shaping

token-bucketbased queuing and shaping

TCP/IP Shaping TCP-IP flow-level advanced shaper with two classes

Adaptive QoS Sharing unused ASN link capacity with low priority internet traffic Supported on

ERM only and enabled by default

## WAN Optimization

TCP Boost Minimize latency and congestion avoidance over the last-mile with WAN rate control

ARR Patented compression and data deduplication algorithms

# Routing

eBGP eBGP support with Preferred Path selection using AS PATH Prepend and MED

(Multi-Exit Discriminator) attributes

MP-BGP and BGP Communities support

Thin RIP (T-RIP) RIPv2.0-compliant routing advertisements to simplify routing configuration

Static route configuration for local subnets, default gateway and IPSec tunnel Static Routing

gateway Forwarding decision based on 6-tuple match criteria and/or DNS

Policy-based Routing Forward to LAN Forward to Internet • Forward to Aryaka

Policy-based Routing based

on Source Address

Forward packets based on IP source address

Granular 6-tuple policy control to forward/drop Aryaka- and internet-bound traffic

### Redundancy

**Route Filters** 

Edge Redundancy

VARP (Virtual ANAP Redundancy

Protocol)

ANAP-to-ANAP backup tunnels

ISP link redundancy

Dual IPSec tunnels to different ISPs for link redundancy

VRRP-like model for ANAP redundancy in active-standby model

Direct IPSEc tunnels between ANAPs across the internet in the unlikely case the primary Aryaka tunnel fails

SMARTlink allows the use of 2 ISP links in an active-active configuration

• Path Selection: Selective routing across the links

· Load Balancing: Distribute traffic across the links on a per-packet basis

• FEC: Replicate or duplicate traffic across the links to recover lost packets

 Timed Replay: flows can be replayed within a link after a delay, to recover lost packets

• Path Loss Recovery (PLR): Introduces a feedback mechanism between the POP and ANAP to determine the exact packets lost during transmission, and recover these packets

MPLS link redundancy Dual MPLS tunnels with redundant ANAP deployment

## Security

**NAT Support** Stateful flow tracking based on NAT policies

- Source NAT support 1-to-1 NAT, dynamic IP and port
- Destination NAT support port forwarding and port translation

**ANAP Datasheet** 

Firewall and Branch Segmentation L3/L4 Stateful Firewall for perimeter firewalling and East-West Branch

Segmentation

Multi-Tenancy support through VRF-based Microsegmentation

Check Point Hosted VM Next Generation Firwewall as VNF (Virtual Network Function)

Palo Alto Networks Hosted VM Next Generation Firwewall as VNF (Virtual Network Function)

Zscaler IPSec IKev1 support (in addition to GRE tunnels)

Private VLANs ANAP Ability to group a set of VLANs and restrict access only to internet Secure ANAP

Hardening SEC-2 bootstrap process with secure ANAP image

### Cloud Security Connectors

Check Point IPsec IKEv1, IKEv2 or GRE tunnels

Policy-based routing between internet, Aryaka and Check Point CloudGuard

Connect bound traffic

CloudGuard Connect MyAryaka for Tunnel Connectivity monitoring to Cloudguard Connect

Zscaler Support for Redundant GRE tunnels Policy based routing between internet, Aryaka

and Zscaler bound traffic MyAryaka support for visibility and configurability

Palo Alto Prisma IKEVI based IPsec tunnel Policy based routing between internet, Aryaka and Palo

Alto Prisma bound traffic MyAryaka support for visibility and configurability

Symantec IKEv1 based IPsec tunnel Policy based routing between internet, Aryaka and

Symantec bound traffic MyAryaka support for visibility and configurability

### Monitoring

Syslog Flow logs for packets routed between LAN, internet and Aryaka sites

Flow Logs for packets dropped due to policies or firewall rules

System logs

RFC 5424 support

Key, value pair-based attribute logging for easier parsing

Support for UDP and TCP based connectivity to collector

Netflow Support for NDE version 1,5 and 9. Default of 9.

Ability to monitor LAN, Internet, cloud security connectors, and Aryaka traffic. 1:1

sampling rate

Flow information is uploaded to ANAP to MyAryaka every 300 seconds

### Virtual Network Function Support

Hosted Virtual Machine (VM) Support of 3rd party VMs via Linux KVM





+1.888.692.7925



info@aryaka.com

© COPYRIGHT 2015-2024 ARYAKA NETWORKS, INC. ALL RIGHTS RESERVED.